



Lens Ø20mm - 40° FWHM - WIDE without legs

Low Profile Lens


Low profile lens with 40 ° WIDE aperture, suitable for most 3535 led sources with 1mm squared chip and equipped with a primary lens. The correct beam aperture depends on the type of led source used. The lens is equipped with a rear collar which, supported by the printed circuit, allows the lens to be positioned correctly with respect to the led.

Technical data

| | |
|-----------------------|---|
| Code | LPL_D20_SP40G |
| Description | Lente Ø20 - 40° FWHM - WIDE senza piedini con collarino fuoco lente |
| Diametro (mm) | 20 |
| Thickness (mm) | 12,5 |

| | |
|-----------------|------------------|
| FWHM (°) | 40 |
| Material | PMMA HT121 |
| Finish | Esa Fine |
| Family | Low profile lens |

Photometric diagrams and polar or Cartesian charts

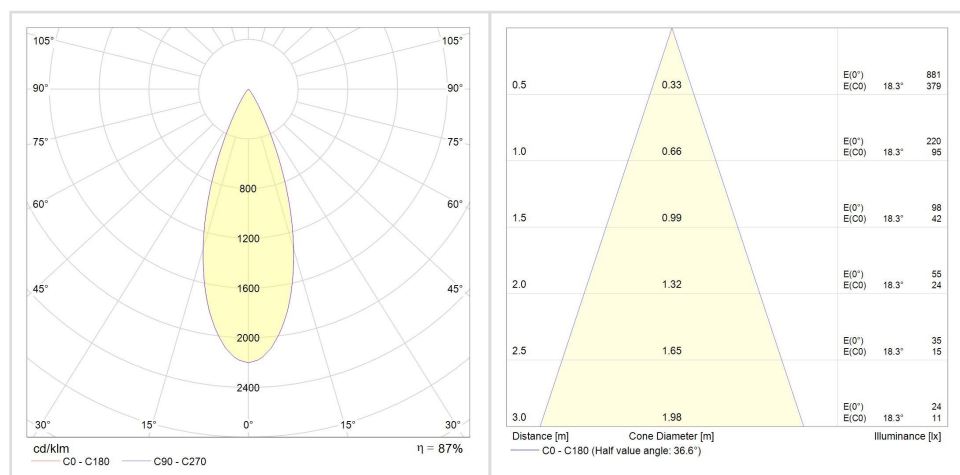

Lighting data referenced to 100lm CREE XP-E led flow.