



Lens Ø20mm -10° FWHM - NARROW with legs

Low Profile Lens


Low profile lens with 10 ° SPOT beam aperture, suitable for most 3535 led sources with 1mm squared chip and equipped with primary lens. The correct beam aperture depends on the type of led source used. The lens is equipped with two pins for the correct positioning of the lens with respect to the led and a third pin only for support.

Technical data

Code	LPL_D20_P10G
Description	Lens Ø20mm -10° FWHM - NARROW with legs
Diametro (mm)	20
Thickness (mm)	12,5

FWHM (°)	10
Material	PMMA HT121
Finish	Clear
Family	Low profile lens

Photometric diagrams and polar or Cartesian charts

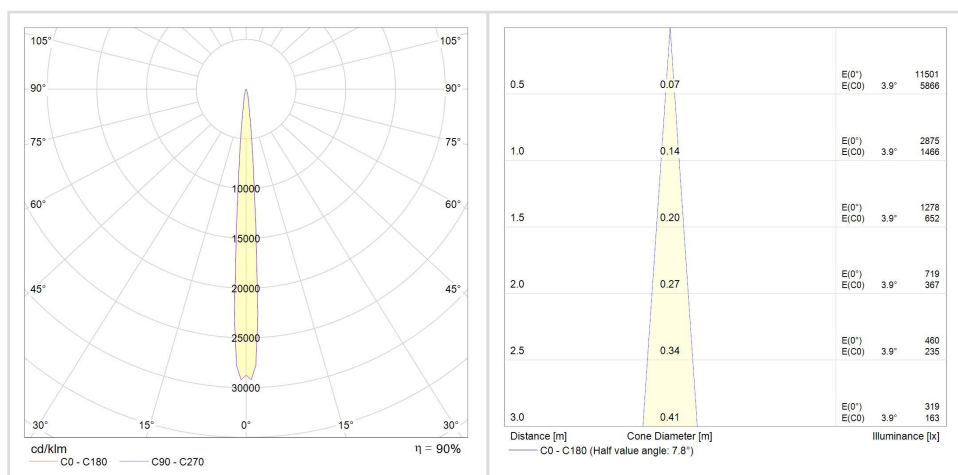

CREE XP-E led lighting data referenced to 100lm.